

405660

Certified, Filed and or Recorded on
September 24, 2014 12:19 PM

BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

By: BN

B -- V -- I


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 32, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On _____ found a _____

left monument as found lowered monument removed monument (explain)
 on Dec 17/2011 placed an 1/2" x 14" IRON PIPE WITH CAP #19552 AT
2003 C.I.M. LOCATION

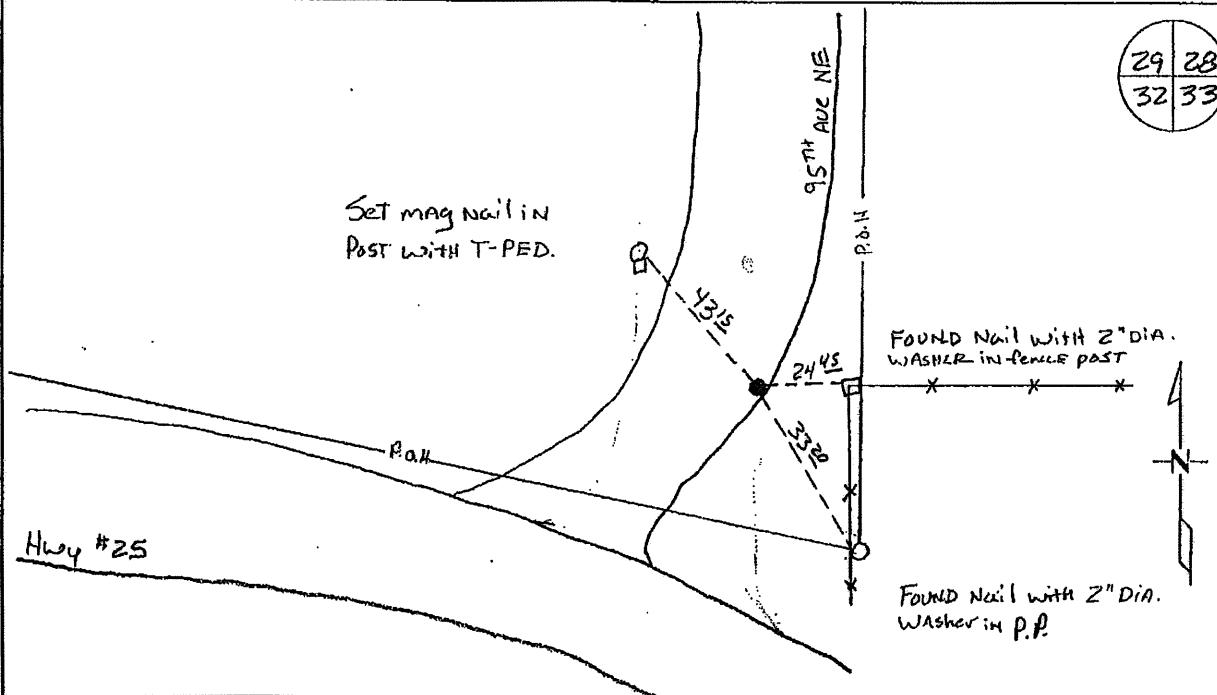

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 9/18/2014

Benton County Surveyor's Office
 Jerome C Wittstock, Deputy County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

B322

Northeast Corner of Section 32, Township 38 North, Range 29 West, Alberta Township,
 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

12" Aspen	S 38 E	25 links
15" Aspen	N 33 1/2 W	35 links

No Date: County Surveyor's Record Book 2, page 301, shows a post at the corner.

1902 County Surveyor's Record Book A, Map No. 36, shows a survey of Section 33 by John Whilt. Survey shows a post at the corner location.

1940's Roll F-1, of MN/DOT road alignment records, File No. 12-80, note the corner is a fieldstone in center of roads west and north. The corner is 398.8 feet west of the P.I.

1981 Paul Wellen, LS 10461, found a 3/4" pipe and verified its location using Highway Map Information. He replaced it with a cast iron monument and filed Certificate of Location (#160211).

2003 Westwood Professional Services, Inc. found CIM.
 County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 169664.852
 E- 521485.804


2008 Westwood Professional Services, Inc. found a cast iron monument at the corner location. CIM agrees with 1981 Wellen ties as shown on Doc. No. 160211. We search for the PI and any accessories to it and found no evidence. CIM measured 395.85 feet west of a computed PI location by locating the traveled road tangents which agrees favorably with 1940's MN/DOT alignment plans. In 2003 we searched by hand digging stone as shown on MN/DOT and found nothing in the search area. The alignment of 95th Ave. NE has changed significantly from the 1940's plan, and it appears as if a fair amount of earth moving had to be done when road was relocated as stone may have been destroyed. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with our 2003 position.

2011 The Benton County Surveyor's Office placed a 1/2" by 14" iron pipe capped 19552 in place of the cast iron monument, which had been destroyed by road construction.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 21st day of July, 1981, I did find the northeast corner of Section 32, Twp. 38, Rg. 29, Benton County, Minnesota, which was evidenced by 3/4 inch iron pipe as per location from State Highway right-of-way map.

I further certify that in order to perpetuate said corner I did at the exact location thereof place a permanent marker consisting of a Benton County Cast Iron Monument and that I did establish witness or reference monuments as shown below:

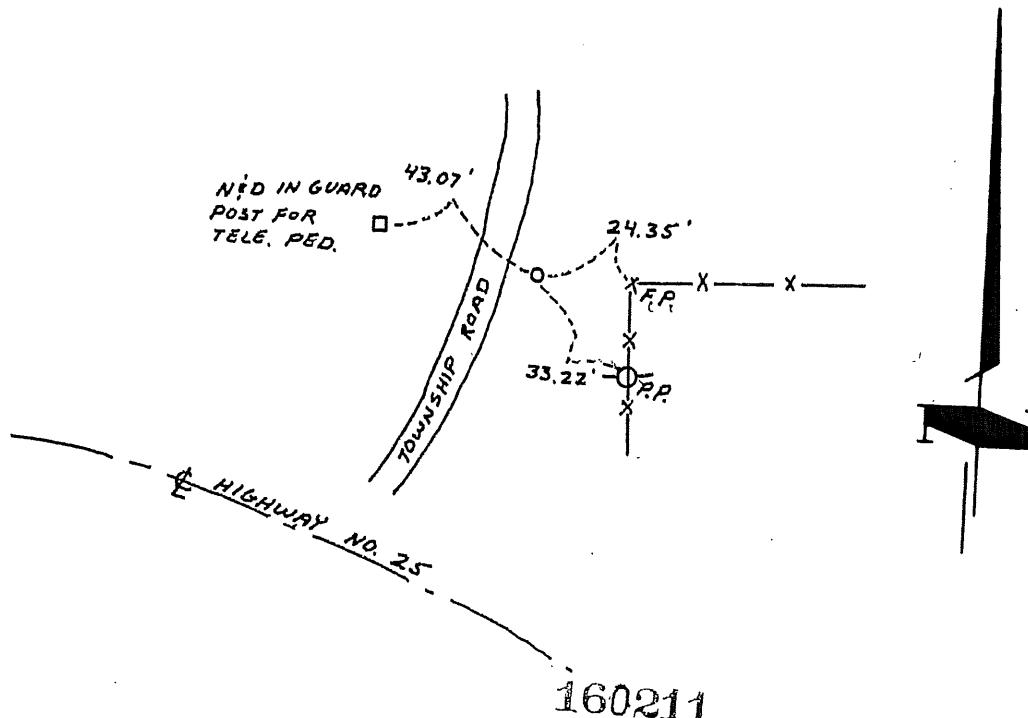

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

Paul Allen
Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 10th day of September, 1981 at 1 P.M.

J. A. Johnson
County Recorder

By _____ Deputy.