

Office of the County Recorder, BENTON County, Minnesota
I hereby certify that the within instrument was filed for record in this office on the
day of 200.

COUNTY RECORDER

By _____ Deputy,

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 23, Township 38, Range 29

4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 08/01 DATE found a P.K.

left monument as found lowered monument removed monument (explain)
 On 12/19/01 DATE placed a Cast Iron Monument

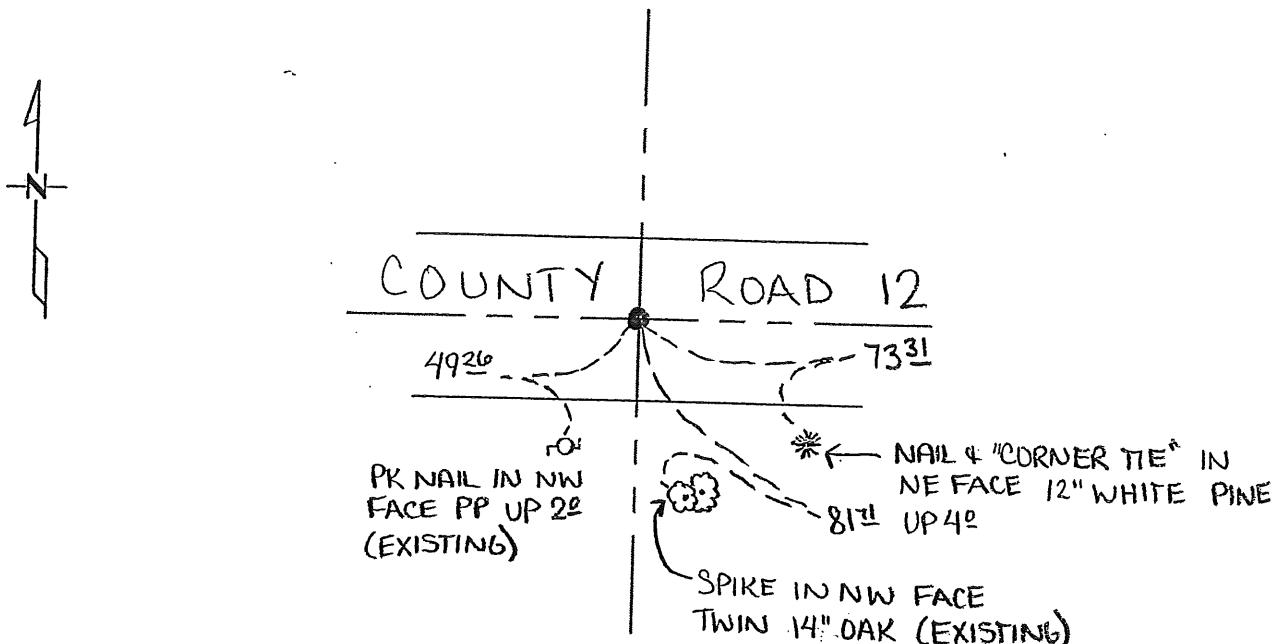

Ties that are found and in good condition are noted as 'existing'. New tree and power pole ties are to the head of a nail with a brass disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature James Weller

Date 4/18/02

License No. 10461

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

B231

The North Quarter Corner of Section 23, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

In August of 1855 this corner was established by GLO, Oscar F. Davis set a wood post at this location and bearing trees were recorded.

11" B. Ash S 59 E 5 links
7" B. Ash N 11 W 22 links

On July 24, 2001 Westwood Professional Services, Inc. found a PK at the intersection of the centerline of County Road 12 and an occupation line to the south.

On August 14, 2001 Westwood Professional Services, Inc. dug with a backhoe at the location of the PK down 4.0 feet. Found no trace of an existing monument. Distance between the NE and the NW corners of Section 23 is 5222.39 feet. The PK is 0.29 feet south and 0.06 feet east of the lost position.

On December 19, 2001 Westwood Professional Services, Inc. set a cast iron monument at the location of the PK and established reference ties. It is obvious that the PK has been set as a lost corner.

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-180395.768
E-534356.758

MARILYN J. NOVAK
COUNTY RECORDER
BY Marilyn J. Novak DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

285649

2002 MAY -7 A 8:31